



OVER 45 YEARS OF
DEPENDABLE EQUIPMENT FOR
PROGRESSIVE FARMING


PEANUT DIGGER SHAKER



INVERTER



~2, 4, 6, & 8 ROW MODELS~

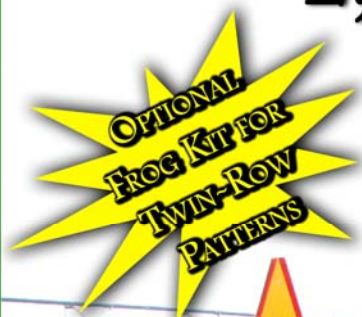

#1 CHOICE FOR GROWERS
WHO WANT A QUALITY, PROFITABLE DIGGING JOB!

KMC DIGGER SHAKER INVERTERS:

*DESIGNED WITH QUALITY AND EXCELLENCE TO HELP YOU
INCREASE YOUR PEANUT PROFITS!*

*LEGENDARY KMC INVERTERS HELP BOOST PEANUT PROFITS BY DELIVERING A SUPERIOR
HARVESTING JOB THAT PAYS OFF IN REDUCED LOSSES AND BETTER CROP QUALITY.*

HIGH QUALITY INVERTING

- ~ Vines are inverted into tight, compact, erect windrows that cure uniformly and feed easier into the combine.
- ~ Taller height of windrows helps keep peanuts off the ground during extended rainy weather to preserve quality and prevent loss.
- ~ Narrow width of windrows provides space for tractor tires to travel in without running over vines and knocking off peanuts.



CLEANER WINDROWS

- ~ Efficient dirt knocker wheels underneath rattler bars are adjustable for removing soil, rocks, and other foreign material from vines.
- ~ Open design of inverter drums lets additional debris sift through.



GENTLE, EASY OPERATION

- ~ Vines are undercut and lifted gently onto the rattler bars for transfer to the inverting drums.
- ~ Smooth belt drive operation allows vines to flow uninterrupted and prevent peanuts from being knocked off. The design permits inverting drums to form consistent, ribbon-like windrows for combining efficiency.
- ~ Broad rattler bars and wide inverting drums allow for acceptable inverting in the largest of vine conditions, even if the operator gets off the row.



LOW MAINTENANCE, REPAIR EXPENSE

- ~ No extensive, time-consuming daily maintenance required.
- ~ Less downtime and repair expense from use of high quality bearings, sheaves, sprockets, and other drive components.

DRIVE OPTIONS

- ~ Available with optional bolt on hydraulic drive or PTO drive.

AVAILABLE IN 2, 4, 6, & 8 Row MODELS



2 Row: POPULAR CHOICE OF SMALL TO MEDIUM ACREAGE PRODUCERS.



4 Row: MORE DIGGING CAPACITY THAN 2-ROW MODEL WITH NEW DESIGN IMPROVEMENTS FOR BETTER PERFORMANCE.



6 Row: FAVORITE OF 6-ROW GROWERS WHO WANT TO HARVEST FASTER WITH REDUCED LABOR, TRACTOR, AND FUEL EXPENSE. UTILIZES HARD TRACTOR WHEEL MIDDLES FORMED DURING PLANTING, ALLOWING ALL SIX ROWS TO BE INVERTED UNIFORMLY AND SPACED EVENLY.



8 Row: MAXIMUM CAPACITY DIGGING. ALLOWS EIGHT ROWS TO BE INVERTED UNIFORMLY AND SPACED EVENLY.

QUALITY DESIGN AND WORKMANSHIP



Highly-functional 3-wheel dirt knocker assembly can be adjusted to remove soil, rocks, and other debris for cleaner windrow conditions. Replaceable dirt knocker pads on rattler bars.

- ~ Rugged, heavy-duty frames and hitches; top quality bearings, sprockets, sheaves, chains, and other components.
- ~ High quality T-1 steel plow standards are designed to hold position and resist wear for years of use.
- ~ Easy plow frog adjustment permits shop floor setting that does not require field changing.
- ~ Longer high-strength rattler bars and narrow fenders allow a constant flow of vines without dragging. Rattler bar tooth design is aggressive enough for pickup and gentle enough for release onto inverting drums.



High-capacity, low maintenance inverting system is designed to gently convey and control vines from rattler bars to the ground, assuring uniform windrows with virtually no plugging even in roughest conditions. Rigid vine guide rods do not require frequent adjustments in the field.



ALSO FROM KMC:

2 & 6 Row VINE LIFTERS

- REAL CROP SAVERS IN RAINY WEATHER
- BREAKS UP CRUSTY CONDITIONS AND FREES PEANUTS FROM WET STICKY SOIL
- HELPS VINE DRY FASTER



6-ROW FOLDING VINE CONDITIONER

- ALLOWS PEANUT TO DRY FASTER
- CLEANS DIRT AND FOREIGN MATERIAL FOR IMPROVED GRADES
- FLUFFS AND LIFTS VINES

SPECIFICATIONS

Model #	Weight (lbs.)	Recommended Tractor HP	PTO	Pickup	Total Machine Width	Height	Length	Hitch
2-36 2-Row	2,190	80-90	540-1,000	64"	88 ¾"	62"	162 ½"	Cat. II, Cat. III Quick Hitch (Narrow)
4-31 4-Row	3,790	130-140	1,000	2-53 ½"	138"	62"	153 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
4-36-38 4-Row	3,840	130-140	1,000	2-64"	160"	62"	153 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
4-40 4-Row	3,910	130-140	1,000	2-64"	165"	62"	153 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
6-31 6-Row	5,870	165 Up	1,000	3-53 ½"	201"	62"	165 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
6-36 6-Row	5,900	165 Up	1,000	3-64"	234"	62"	157 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
6-38 6-Row	5,920	165 Up	1,000	3-64"	241"	62"	157 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
6-40 6-Row	5,950	165 Up	1,000	3-64"	249"	62"	157 ½"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
8-31 8-Row	7,600	180 Up	1,000	4-53 ½"	263"	62"	165 ½"	Cat. III, Cat. III Quick Hitch (Wide & Narrow)
8-36 8-Row	7,780	180 Up	1,000	4-64"	307"	62"	157 1/2"	Cat. III, Cat. III Quick Hitch (Wide & Narrow)
8-38 8-Row	7,800	180 Up	1,000	4-64"	315"	62"	157 1/2"	Cat. III, Cat. III Quick Hitch (Wide & Narrow)
8-40 8-Row	7,850	180 Up	1,000	4-64"	329"	62"	157 1/2"	Cat. III, Cat. III Quick Hitch (Wide & Narrow)
8-36 8-Row Flat Fold	10,100	225 Up	Hydraulic Drive	4-64"	178" Folded 309" Flat	156" Folded 104" Flat	168"	Cat. III, Cat. III Quick Hitch (Wide & Narrow)
Vine Lifter 2-Row	378	30 Up	-	54" Up	90"	45"	36"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
Vine Lifter 6-Row	858	70 Up	-	Up to 6 40" Rows	248"	45"	36"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)
Vine Conditioner	2,240	25-50	540-1,000	3-64"	226" (138" Folded)	41" Flat 106" Folded	71"	Cat. II, III, Cat. III Quick Hitch (Wide & Narrow)



KELLEY MANUFACTURING CO.

80 VERNON DRIVE/ P.O. DRAWER 1467

TIFTON, GA 31793

1-800-444-5449

www.kelleymfg.com

Follow us on

